

Video 15 SB

Fluid head



The key to Sachtler's successful fluid heads is their step switching. Now our innovative SPEEDBALANCE technology enables even faster and finer counterbalance of your camera system. By reducing the minimum payload, the heads' overall payload range is increased.

The fluid head Video 15 SB is delivered with the Touch & Go® plate 16 (Code No. 1064). It comes with a 1/4" screw and 3/8" screw. Spare camera screws (1/4"/ 3/8") and a pin screw are stored in the balance plate. The pin screw fits in the center hole of the camera plate. Thus a pin/1/4" screw connection can be achieved if your camera requires this connection.

If your camera remains front- or back heavy after going through the necessary centring procedure you may solve this by using the C.O.G. plate (Code No. 1063). This plate offers a removed position. The C.O.G. plate can be mounted to either the front or the back. It cannot be operated with pin and 1/4" screw.

Technical Facts

Weight	2.8 kg / 6.2 lbs
Payload	1 - 16 kg / 2.2 - 35 lbs
Sliding range - plate	70 mm / 2.8 in
Counterbalance	in 12 steps
Grades of drag	7 each horizontal and vertical + 0
Tilt range	+90/-75°
Temperature range	-40° to +60° C / -40 to +140° F
Camera fitting	Touch & Go Plate 16
Tripod/Pedestal fitting	100 mm bowl, integrated flat base fitting
Pan bar(s)	1, telescopic, Type DV right
Level	self-illuminating Touch Bubble
Batteries Level	3 x 625U or LR9
Adapter viewfinder extension	optionally

Payload

C.O.G.* min. kg / max.

75 / 3" 1.7 / 3.7 20.4 /

100 / 4" 1.4 / 3.2 17.3 /




125 / 5" 1.3 / 2.8 15.0 /

150 / 6" 1.1 / 2.4 13.3 /

175 / 7" 1.0 / 2.2 11.9 /

200 / 8" 0.9 / 2.0 10.8 /

250 / 0.8 / 1.7 9.1 /

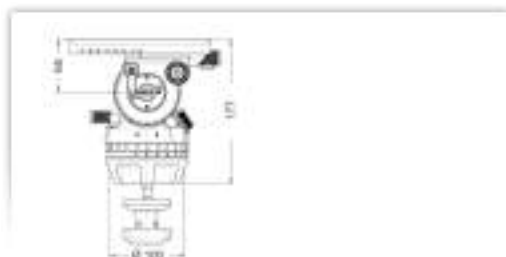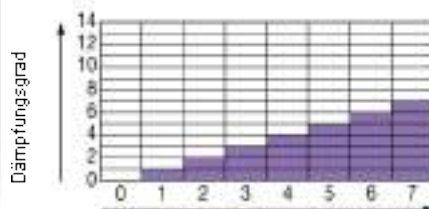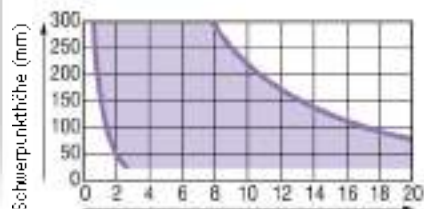

Further photos



Order data

Article	Order code
Video 15 SB Fluid head	1505

This product is also available in the following systems:

Article	Order code
System 15 SB ENG 2 CF	1562
System 15 SB ENG 2 MCF	1563
System 15 SB SL MCF	1565

Accessories

