

■ Spinhawk Camera Head Setup

FilmGEARgrip

+45 70220302

Assembling of Top & Bottom plate

- Push the locking lever on the both side of the Spinhawk camera head upwards.



- Properly insert the base plate in the Spinhawk camera head.

NOTE: There are strategically placed 3/8"-16 threaded holes for endless mounting capabilities .



- Push the locking lever of the base plate upward and insert the top plate.



- After inserting the top plate, push the locking lever of the top plate downward and lock the plate.




NOTE: It is Simple, Effective, and one of the most Affordable & High-Quality Gears designed for worldwide professionals to achieve an impressive 360° rotating scene with ultimate precision.



Assembling of Rod Adapter

- Attach the Rod Adapter by properly matching it with the threads of the top plate and properly tighten it using the screw driver **(Not Included)**.

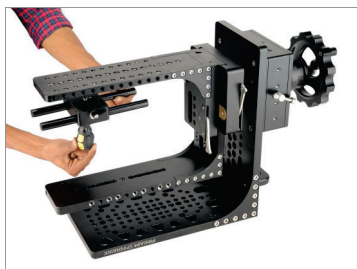

NOTE: There are 15mm rods support complete your setup with accessories like a matte box and follow focus & lens support.

Mounting of Fluid Head

- Remove the castle ring of the Fluid Head **(Not Included)** and mount it on the stand **(Not Included)**.

NOTE: You can use it with a heavy fluid head to get impressive footage with smooth pans, controlled tilts, and seamless transitions.





- Attach the castle ring at the bottom of the fluid head and then tighten it properly.



- Slide the camera plate by pressing the push pin of the Fluid head and then remove the plate.



- Attach the camera plate by matching it properly with the threads of the Spinhawk.

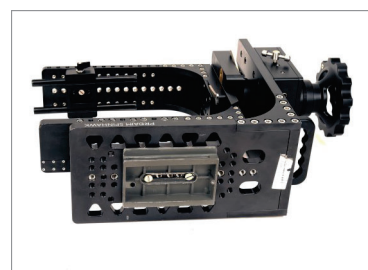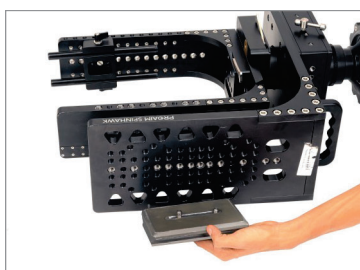

- Properly slide the camera on the Fluid Head.


NOTE: It securely mounts your film video camera equipped with 3/8"-16 mounting holes to a tripod or fluid head; you can even bolt the head to the table, suiting the availability.



360° Rotation of Spinhawk

- Open the wheeled crank handle of the Spinhawk Camera Head.

NOTE: The head is equipped with an ergonomic wheeled crank handle that lets you easily rotate the rig and allows for more effortless visual adjustment to specific positions.

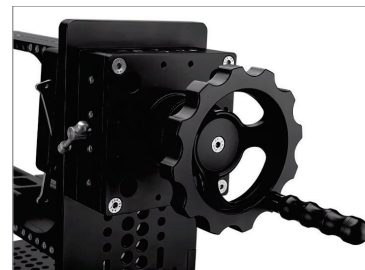

- Loosen the balancing knob of the Spinhawk camera head and rotate the plates of the Spinhawk using the crank handle and then set the position of the plates accordingly.




- After rotating the plates of the Spinhawk, properly tighten them using the balancing knob.

NOTE: A balancing Knob & locking lever integrated into the head ensures a secure lock-off to the camera setup.



360° Rotation of Spinhawk Camera Head with Ultimate Precision.

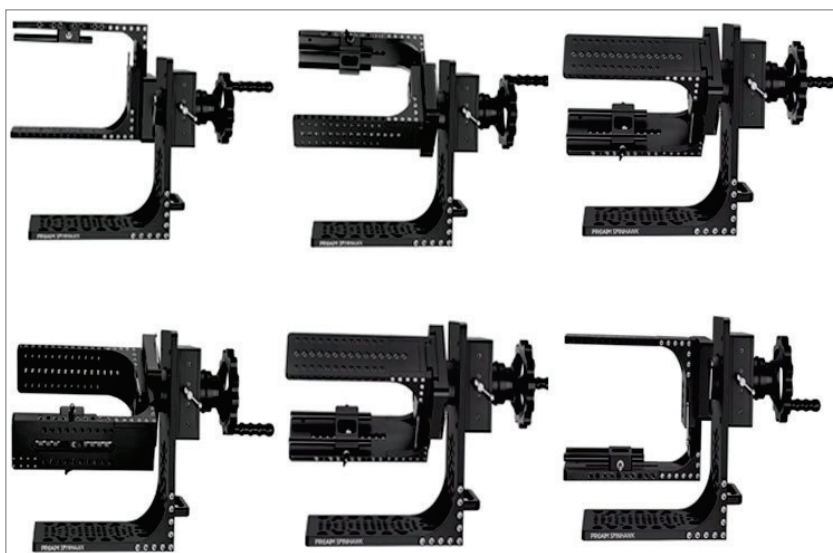

FilmGEARgrip
+45 70220302

Camera Mounting Setup

- Insert the camera bolt in the base plate and mount the camera by matching the camera with the threads of the bolt.
- After mounting the camera, tighten it properly using the screw driver (**Not Included**).
- Camera can also be mounted on the base plate without the top plate, as shown in the image.
- Loosen the adjustment knob of the Rod Adapter and set the position of the rods accordingly.
- After setting the position of the rods, properly tighten them using the adjustment knob.
- Attach the Follow Focus (**Not Included**) to the rods of the Rod Adapter and properly tighten it with the red knob.

